



FEDMALL 


CLICK HERE TO ORDER THIS ITEM IN FEDMALL

LOG ON TO FEDMALL IN A 2nd TAB FIRST

Tent Extendable Modular Personnel – Type IV

8340-01-196-6272 Type IV – 32' x 20' Personnel Air Force R.D.F. (Green)

The Tent Extendable Modular Personnel (TEMPER) is an aluminum framed supported tent made of vinyl coated polyester duck cloth that is fire, mildew and water resistant. The outer cloth is also visual and electronic suppressive with blackout coated for protection against night optic vision gear. The colors specified have spectral reflectance properties that will camouflage it against the intended terrain. The TEMPER is designed so that it can be extended in 8 ft. increments and set up in multiple configurations. The 8 ft. long extendable middle section comes with either a window or door on each sidewall. The roof panels feature either a stovepipe shield for a standard 4" stovepipe (temperate sections) or two large screened panels for extra ventilation (desert/tropical). Both have weather seal flaps. The liners have a bright white interior and an extra blackout lamination for a tactical environment. The roof fly helps shield the tent from the elements.

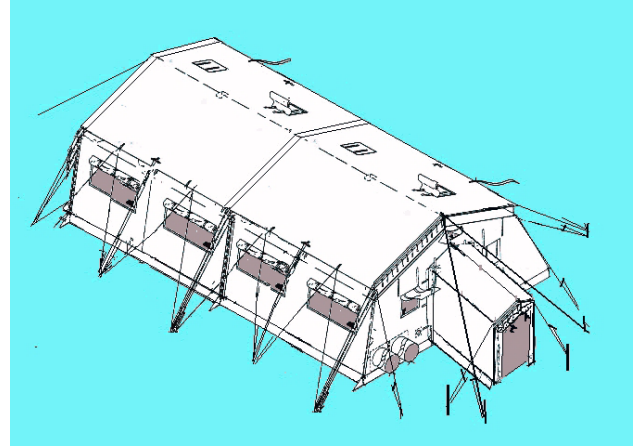

TYPE IV KEY FEATURES:

- Made of vinyl coated polyester duck cloth that is fire, mildew and water resistant
- Plenums have cloth heating and air conditioning ductwork
- Floors consist of single ply cloth and foam insulated cloth both with anti-skid properties
- Vestibules have becket and lace connectors that can provide a blackout entrance or connect to other tents as well as double bump doors

Type IV Description:

The green Type IV TEMPER is an personnel air force R.D.F. tent that is 20 ft. wide by 32 ft. long. It has 1 vestibule, weighs 1328 pounds, and has a shipping cube of 173 cu. ft. The end walls feature a door that zips closed and has a 54 in. wide and 6 ft. 11 in. height opening. Two polymer windows with screening and weather seal blackout flaps are located on each end section. The tent now includes advanced heat seal seam construction that helps lock out the elements. Additional optional items include insulated liners, floors, hard double bump through door, chemical/biological resistant liners, and environmental control units.


TEMPER Type IV includes the following:

	NSN	DESCRIPTION	QUANTITY
1.	8340-01-186-3014	End Section (Green)	2
2.	8340-01-186-3021	Window Section (Temperate) (Green)	4
3.	8340-01-186-3018	Tent Fly, 16' (Green)	2
4.	8340-01-392-0921	End Section Liner (Temperate)	2
5.	8340-01-392-0924	Intermediate Liner (Temperate)	2
6.	8340-01-186-3024	Tent Floor, 8' Single Ply (Green)	4
7.	8340-01-186-3026	Green Vestibule with Door	1
8.	8340-01-186-3027	Vestibule Floor, Single Ply (Green)	1
9.	8340-01-186-3029	Vestibule Container	1
10.	8340-01-186-3032	Partition	3
11.	8340-01-186-3019	Tent Cover (Green)	2
12.	8340-01-186-3030	Bag, Pin Container	4
13.	8340-01-186-3036	Plenum, Extendable, 16'	1
14.	8340-01-211-6798	Plenum, Side Entrance, 16'	1
15.	8340-01-985-7461	Tent Pin, Steel 18"	60
16.	8340-01-261-9751	Tent Pin, Wood 24"	25
17.	8340-01-239-7003	Frame, End Section w/Cover Includes: Arch Assembly (2), 8340-01-240-5854 Cable Header Assembly (2), 8340-01-477-9657 Purlin Assembly (5), 8340-01-186-3005 Eave Extender Assembly (4), 8340-01-186-3009 Ridge Extender Assembly (2), 8340-01-186-3008 Transport Cover Assembly (1), 8340-01-186-3013	1
18.	8340-01-239-7001	Frame, Window Section w/Cover Includes: Arch Assembly (1), 8340-01-240-5854 Cable Header Assembly (1), 8340-01-477-9657 Purlin Assembly (5), 8340-01-186-3005 Eave Extender Assembly (2), 8340-01-186-3009 Ridge Extender Assembly (1), 8340-01-186-3008 Transport Cover Assembly (1), 8340-01-186-3013	3
19.	8340-01-186-3010	Vestibule Frame Assembly (3 per Vestibule)	3

PRODUCT SPECIFICATIONS:

- **Dimensions:** 32'Length X 20'Width X 10' 1/2" Ridge Height and 6' 9" Eave Height
- **Floor Area:** 640 square feet
- **Weight:** 1328 pounds
- **Color:** Green
- **Set-up Time/# of Persons:** 40 min. / 5
- **Strike Time/# of Persons:** ?
- **Shipping Cube:** 173 cu. Ft.

The Technical Manual for this tent is TM 10-8340-224-13.

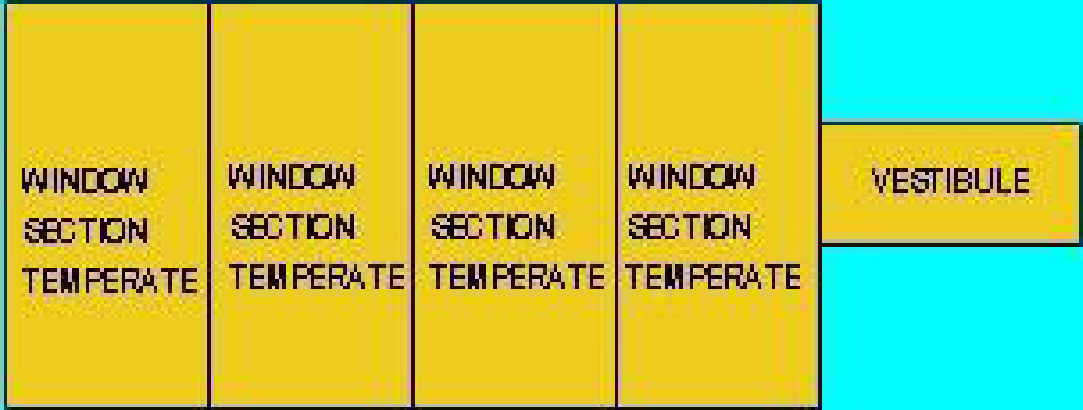

TYPE IV TEMPER FOOTPRINT